

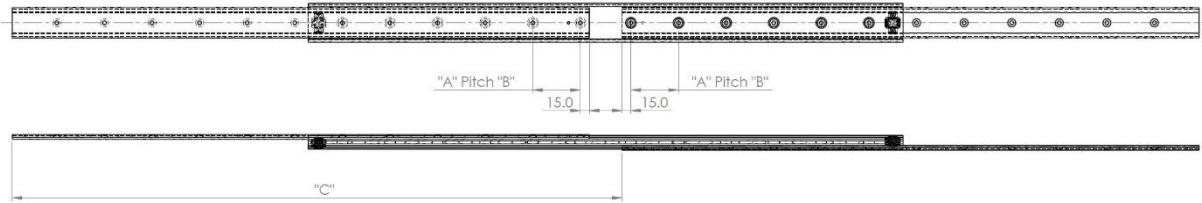


6526 Aero



PROFESSIONAL RANGE



Configuration Table					
Part Number	Installation Length "L"	Extension Length "C"	Load Per Pair	Drill Table	
				"A"	"B"
4013.6526.0300	300	325	290	80	2
4013.6526.0350	350	375	300	80	3
4013.6526.0400	400	425	315	80	3
4013.6526.0450	450	475	320	80	3
4013.6526.0500	500	525	325	80	5
4013.6526.0550	550	575	330	80	5
4013.6526.0600	600	625	340	80	5
4013.6526.0650	650	675	330	80	5
4013.6526.0700	700	725	320	80	7
4013.6526.0750	750	775	310	80	7
4013.6526.0800	800	825	300	80	7
4013.6526.0850	850	875	290	80	9
4013.6526.0900	900	925	280	80	9
4013.6526.0950	950	975	270	80	9
4013.6526.1000	1000	1025	260	80	11

Mounting details
Refer to drill table hole pitches

The 6526 Aero slide design is protected with the European Intellectual Property Office, Register of Community Designs:005322997-0002.




We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.



- Beams: Aircraft grade aluminium 7075 T6. Clear anodised
- Rollers: Stainless inox 316L for hi-load 340kg capacity
- Caged cross-roller bearings for smooth, deflection free, extension
- Unique design: Hi-impact shock springs & raceway cleaning wipers
- Standard lengths & extensions from 300 – 2,500mm
- Special lengths, drillings & surface finish (MIL grade) upon request
- Silent, lightweight & corrosion resistant: 30% the weight of steel

'UK Company, Global Reach'

6526 Aero

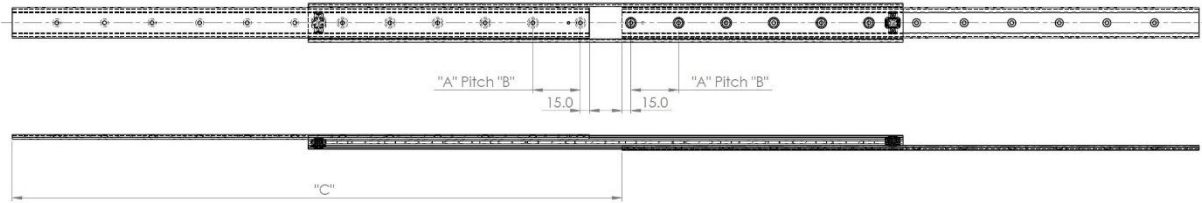

PROFESSIONAL RANGE



Configuration Table					
Part Number	Installation Length "L"	Extension Length "C"	Load Per Pair	Drill Table	
				"A"	"B"
4013.6526.1050	1050	1075	250	80	11
4013.6526.1100	1100	1125	240	80	11
4013.6526.1200	1200	1225	220	80	13
4013.6526.1300	1300	1325	190	80	15
4013.6526.1400	1400	1425	165	80	15
4013.6526.1500	1500	1525	145	80	17
4013.6526.1600	1600	1625	130	80	17
4013.6526.1700	1700	1725	115	80	19
4013.6526.1800	1800	1825	95	80	21
4013.6526.1900	1900	1925	75	80	21
4013.6526.2000	2000	2025	60	80	23
4013.6526.2100	2100	2125	50	80	25
4013.6526.2200	2200	2225	35	80	25
4013.6526.2300	2300	2325	30	80	27
4013.6526.2400	2400	2425	25	80	27
4013.6526.2500	2500	2525	20	80	29

Mounting details
Refer to drill table hole pitches

The 6526 Aero slide design is protected with the European Intellectual Property Office, Register of Community Designs:005322997-0002



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

- Beams: Aircraft grade aluminium 7075 T6. Clear anodised
- Rollers: Stainless inox 316L for hi-load 340kg capacity
- Caged cross-roller bearings for smooth, deflection free, extension
- Unique design: Hi-impact shock springs & raceway cleaning wipers
- Standard lengths & extensions from 300 – 2,500mm
- Special lengths, drillings & surface finish (MIL grade) upon request
- Silent, lightweight & corrosion resistant: 30% the weight of steel